AGRICULTURAL SOLUTIONS:
MIXRITE TF SERIES

Features & Benefits

- Uses only water pressure and flow to operate
- Accurate proportioning regardless of changes in water flow or pressure
- Easy to install and service without special tools
- Water and additive fully mix inside the unit – no mixing chamber needed
- Free extra seal kit included with each MixRite unit
- Made of UV resistant materials
- Proven reliability with years of field use in a variety of conditions and applications
- MixRite models available for injection rates ranging from .1% to 10% and water flows from .8 to 110 GPM
- Options available for aggressive additives such as strong acids or chlorine

Basic Bypass Installation

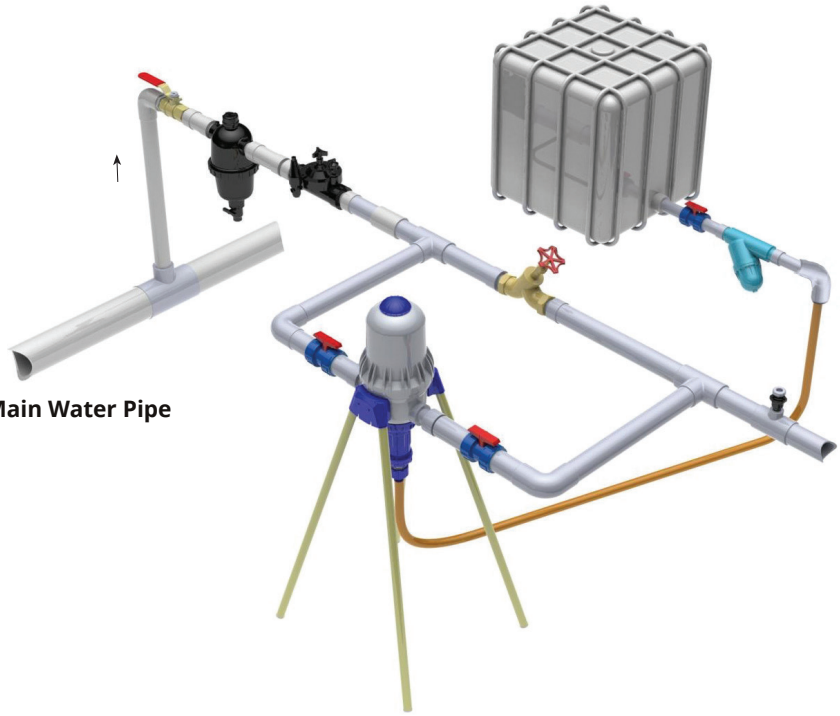

Main Water Pipe

MixRite

Most Popular MixRite Models

MixRite 571CW

- Operates from .8-11 GPM
- Has ¾" NPT connections
- Induction at 0.3-2% or 333:1-50:1
- Aflas seals can handle harsh chemicals including acids and alkalines

MixRite TF.5.002On/Off

- Operates from 1-22 gpm and has 1" connections
- Induction 0.2-2% or 500:1-50:1
- Used for fertigation in greenhouses, CEA, or nurseries

MixRite TF.10.002On/Off

- Operators from 2-45 gpm and has 1.5 NPT connections
- Induction 0.2-2% or 500:1-50:1
- Used for fertigation in greenhouses, nurseries, and open-field drip and pivot irrigation applications

MixRite TF.25.002On/Off

- Operates from 9-110 gpm and has 2" connections
- Induction 0.3-2.5% or 333:1-40:1
- Used for fertigation in greenhouses, nurseries, and open-field drip and pivot irrigation applications

DEMA® MixRite

DEMA Engineering Company

10020 Big Bend Road
St. Louis, MO 63122 U.S.A
Tel: 314-966-3533
Fax: 314-965-8319

www.ag.demaeng.com
sales@demaeng.com